
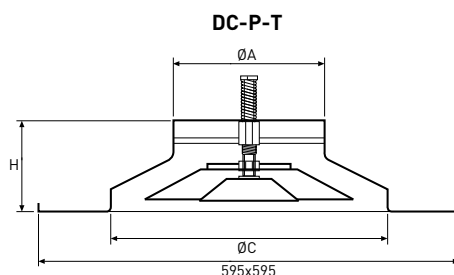
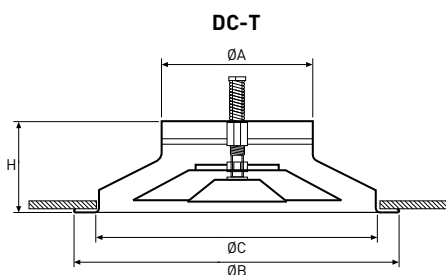
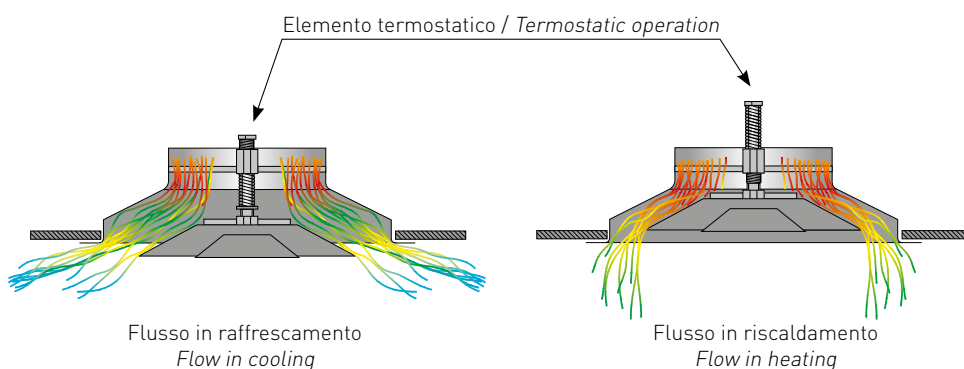





PREZZI / PRICES

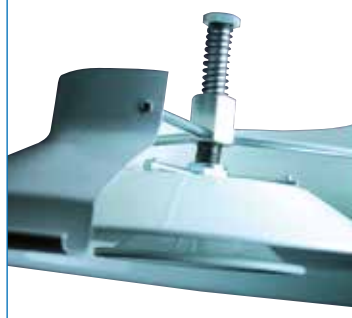
 \varnothing (mm)	Portata Aria / Air flow (m ³ /h)		DC-T	DC-T-P
	NR 25	NR 35	€	€
160	170	350	-	-
200	300	600	-	-
250	450	850	-	-
315	600	1200	-	-
355	800	1600	-	-

DISEGNI / DRAWINGS



 \varnothing A mm	Dimensioni / Dimensions		
	\varnothing B mm	\varnothing C mm	H mm
160	335	288	105
200	423	370	118
250	517	461	130
315	640	576	146
355	730	656	185

Molla termostatica
Thermostatic spring

**Caratteristiche:**

Diffusore a coni regolabili con azionamento termostatico. Modalità costruttive del diffusore come il modello DC e DCP RAL 9010. Modifica della geometria dei coni con molla termostatica prearata. Funzionamento in riscaldamento con differenza di temperatura sino a 30 °C. Funzionamento in raffreddamento con differenza di temperatura sino a 16 °C. Eseguitabile versione su pannello modello DC-P-T.

Characteristics:

Adjustable cone diffuser with thermostatic operation. Methods of construction of the diffuser as the model DC and DCP RAL 9010. Changing the geometry of the cones with thermostatic precalibrated spring. Heating operation with temperature difference of up to 30 °C. Cooling operation with temperature difference of up to 16 °C. Executable version on panel model DC-P-T.