



Film

**Caratteristiche:**

Diffusori ad alette curve ad 1, 2, 3 o 4 direzioni di lancio.

Costruzione:

Alluminio anodizzato.

Impiego:

A soffitto, in mandata.
Altezza di installazione:
2,4 – 3,2 m

Fissaggio:

Fissaggio con viti frontali o a mezzo clips.

Accessori:

- Plenum in acciaio zincato standard o isolato, con o senza rete equalizzatrice.
- Serranda di taratura in acciaio zincato con alette a movimento contrapposto.

Characteristics:

Curved blades air diffusers with 1, 2, 3 or 4 throw directions.

Construction:

Anodized aluminium.

Utilization:

For ceiling installation and for air delivery.

Installation height: 2,4 – 3,2 m.

Fixing:

Fixing by using frontal screws or by clips.

Accessories:

- Galvanized steel plenum, standard or insulated, with or without equalizer sheet.
- Calibration damper made of galvanized steel and fins with opposite movement.

PREZZI / PRICES



	DCA L-1/2	DCA C-1/2	SC	CT	PBZ-1	PBZI-1	PBZ-2	PBZI-2
BxH (mm)	€	€	€	€	€	€	€	€
200x100	-	-	-	-	-	-	-	-
300x100	-	-	-	-	-	-	-	-
400x100	-	-	-	-	-	-	-	-
500x100	-	-	-	-	-	-	-	-
600x100	-	-	-	-	-	-	-	-
800x100	-	-	-	-	-	-	-	-
300x150	-	-	-	-	-	-	-	-
400x150	-	-	-	-	-	-	-	-
500x150	-	-	-	-	-	-	-	-
600x150	-	-	-	-	-	-	-	-
800x150	-	-	-	-	-	-	-	-
1000x150	-	-	-	-	-	-	-	-
300x200	-	-	-	-	-	-	-	-
400x200	-	-	-	-	-	-	-	-
500x200	-	-	-	-	-	-	-	-
600x200	-	-	-	-	-	-	-	-
800x200	-	-	-	-	-	-	-	-
1000x200	-	-	-	-	-	-	-	-
300x300	-	-	-	-	-	-	-	-
400x300	-	-	-	-	-	-	-	-
500x300	-	-	-	-	-	-	-	-
600x300	-	-	-	-	-	-	-	-
800x300	-	-	-	-	-	-	-	-
1000x300	-	-	-	-	-	-	-	-
800x400	-	-	-	-	-	-	-	-
1000x400	-	-	-	-	-	-	-	-
800x500	-	-	-	-	-	-	-	-
1000x500	-	-	-	-	-	-	-	-
595x595 esterno cornice overall size	-	-	-	-	-	-	-	-

VERNICIATURA:






Colori RAL 9010 - 9016: + 15%
Altri colori: prezzi a richiesta

PAINTING:

Color RAL 9010 - 9016: + 15%
Different colors: prices on request

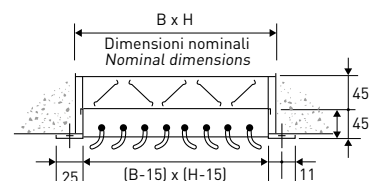
DISEGNI / DRAWINGS**DCA L-2****DCA C-2 + SC**

PREZZI / PRICES


					
	DCA L-3	DCA L-4	DCA L-4Q	SC	CT
BxH (mm)	€	€	€	€	€
300x300	-	-	-	-	-
400x400	-	-	-	-	-
500x500	-	-	-	-	-
595x595 esterno cornice overall size	-	-	-	-	-



DISEGNI / DRAWINGS

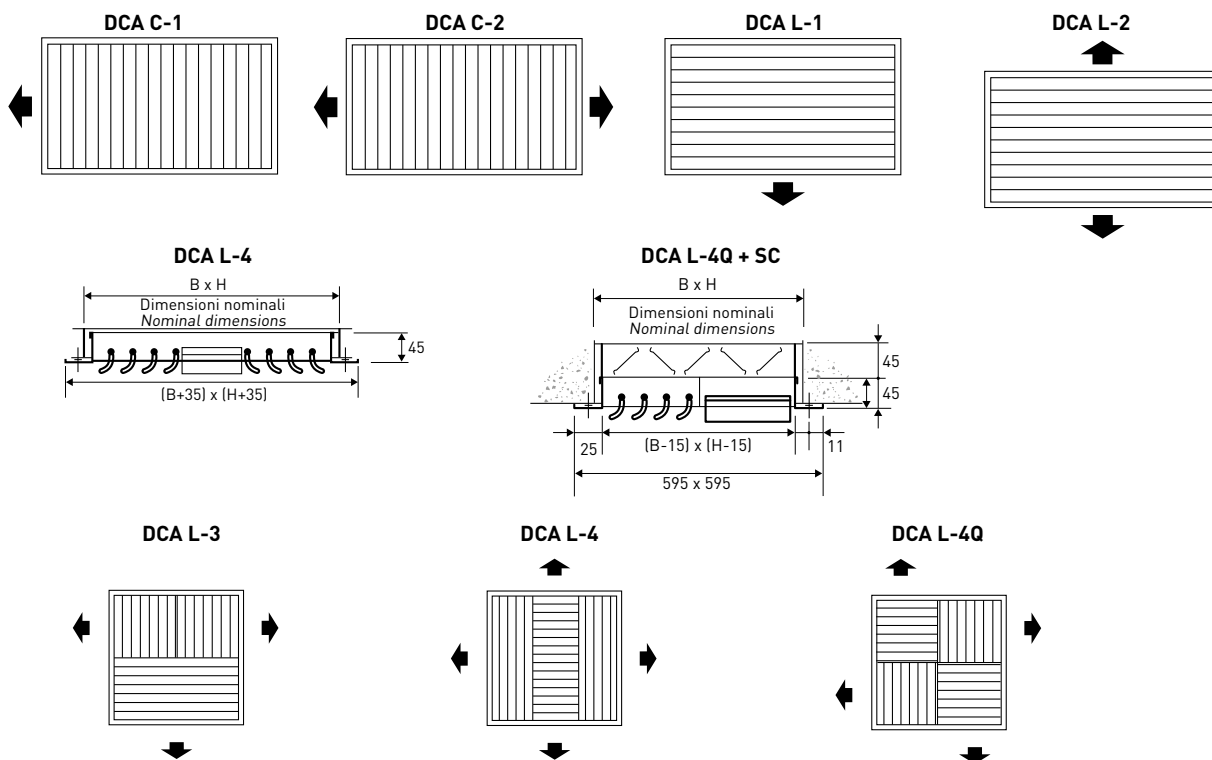

DISEGNI / DRAWINGS

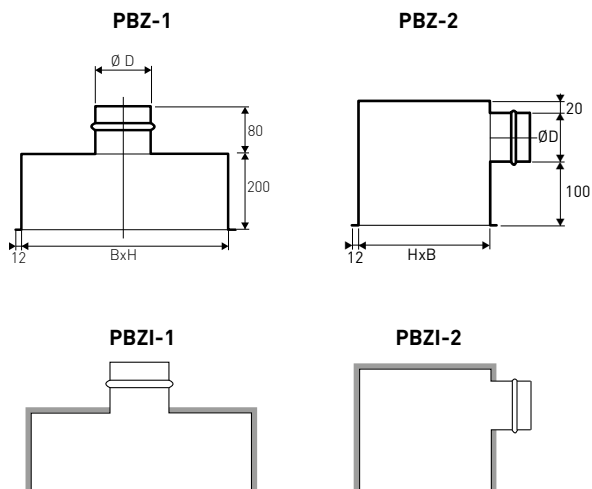

Plenum isolato esternamente spessore 6 mm
Plenum externally insulated thickness 6 mm

DIAGRAMMA SCELTA RAPIDA / QUICK SELECTION DIAGRAM

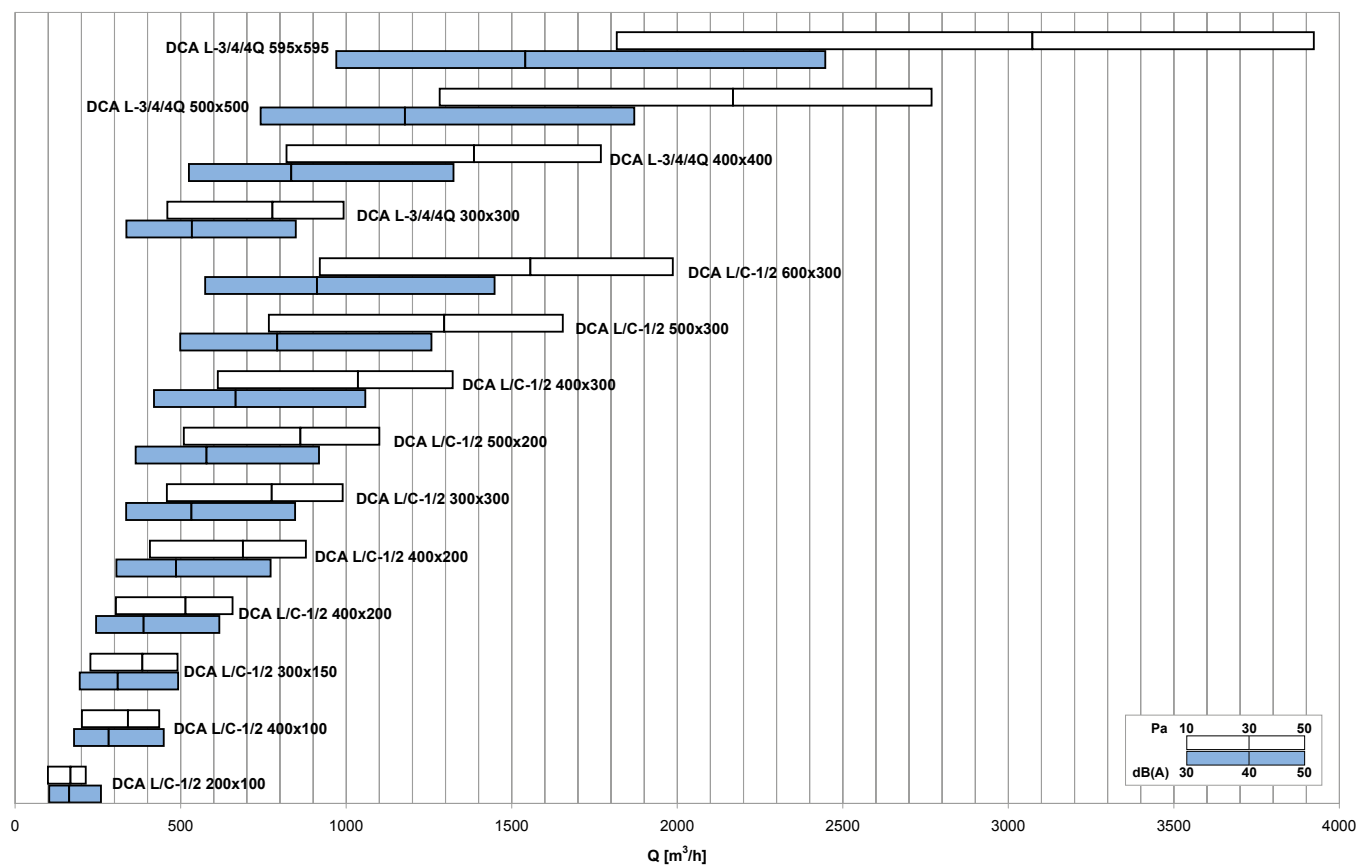


TABELLA DI SELEZIONE / SELECTION TABLE

Modello Model	A _v [m²]	Q [m³/h]		L _{WA} [dB(A)]		X _{10,25} -Y _{0,25} [m]		Dpt [Pa]	
		min	max	min	max	min	max	min	max
DCA L/C-1/2 200x100	0,0068	100	210	29	45	1,7-2,5	4,3-5,3	10	50
DCA L/C-1/2 300x100	0,0104	150	320	31	48	2,5-3,0	5,1-7,4	10	50
DCA L/C-1/2 400x100	0,0139	200	440	33	50	3,0-3,8	6,0-9,5	10	50
DCA L/C-1/2 300x150	0,0157	230	490	34	50	3,2-4,3	6,2-10,3	10	50
DCA L/C-1/2 500x100	0,0174	250	550	34	51	3,3-4,6	6,6-11,2	10	50
DCA L/C-1/2 600x100 400x150 300x200	0,0210	300	660	34	51	3,5-5,3	7,2-12,8	10	50
DCA L/C-1/2 500x150	0,0263	380	820	36	52	3,9-6,5	7,9-15,0	10	50
DCA L/C-1/2 800x100 400x200	0,0281	410	880	36	53	4,0-6,9	8,2-15,8	10	50
DCA L/C-1/2 600x150 300x300	0,0316	460	990	37	53	4,2-7,5	8,6-17,2	10	50
DCA L/C-1/2 500x200	0,0351	510	1100	37	54	4,4-8,1	9,0-18,5	10	50
DCA L/C-1/2 800x150 600x200 400x300	0,0422	610	1320	38	55	4,8-9,3	9,8-21,1	10	50
DCA L/C-1/2 1000x150 500x300	0,0528	770	1650	39	56	5,3-11,0	10,9-24,7	10	50
DCA L/C-1/2 800x200	0,0564	820	1770	40	56	5,5-11,6	11,3-26,0	10	50
DCA L/C-1/2 600x300	0,0634	920	1990	40	57	5,7-12,6	11,9-28,2	10	50
DCA L/C-1/2 1000x200	0,0705	1020	2210	41	57	6,0-13,5	12,5-30,4	10	50
DCA L/C-1/2 800x300	0,0847	1230	2650	42	58	6,5-15,5	13,6-34,5	10	50
DCA L/C-1/2 1000x300	0,1059	1540	3320	43	59	7,3-18,3	15,1-40,4	10	50
DCA L/C-1/2 800x400	0,1130	1640	3540	43	60	7,5-19,1	15,6-42,3	10	50
DCA L/C-1/2 595x595	0,1250	1810	3920	44	60	7,8-20,5	16,3-45,4	10	50
DCA L/C-1/2 1000x400 800x500	0,1413	2050	4430	44	61	8,3-22,4	17,3-49,4	10	50
DCA L/C-1/2 1000x500	0,1767	2560	5530	45	62	9,1-26,2	19,2-57,6	10	50
DCA L-3/4/4Q 300x300	0,0317	460	990	37	53	1,3-2,7	2,7-5,5	10	50
DCA L-3/4/4Q 400x400	0,0565	820	1770	40	56	1,7-3,4	3,5-7,0	10	50
DCA L-3/4/4Q 500x500	0,0884	1280	2770	42	58	2,0-4,1	4,3-8,5	10	50
DCA L-3/4/4Q 595x595	0,1252	1820	3920	44	60	2,4-4,7	4,9-9,9	10	50