

**Caratteristiche:**

Diffusori a flusso elicoidale.

**Costruzione:**

Acciaio verniciato bianco  
RAL 9010.

**Impiego:**

A soffitto, in mandata e ripresa.  
Altezza di installazione:  
BQS = 2,6 - 4,0 m.

**Fissaggio:**

Fissaggio con viti laterali o a  
mezzo vite centrale su ponte di  
montaggio.

**Accessori:**

- Plenum in acciaio zincato  
standard o isolato, con o senza  
rete equalizzatrice, serranda di  
taratura e ponte di montaggio.

**Characteristics:**

Swirl diffusers.

**Construction:**

RAL 9010 white painted steel.

**Utilization:**

For ceiling installation and for air  
intake and delivery.  
Installation height:  
BQS = 2,6 - 4,0 m





**Fixing:**

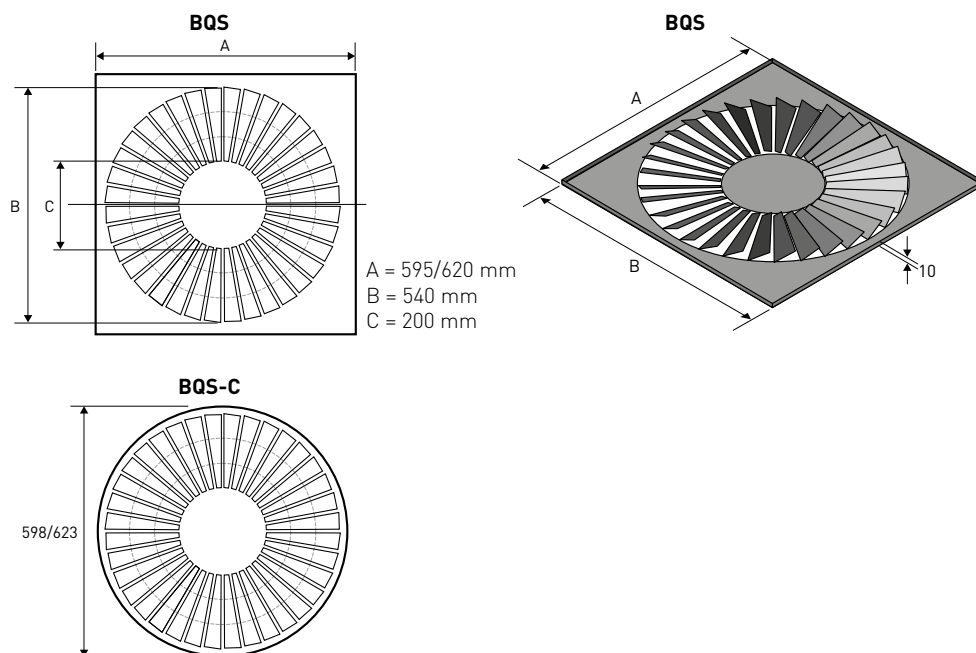
Fixing by using lateral screws or  
central screw on mounting bridge.






**Accessories:**

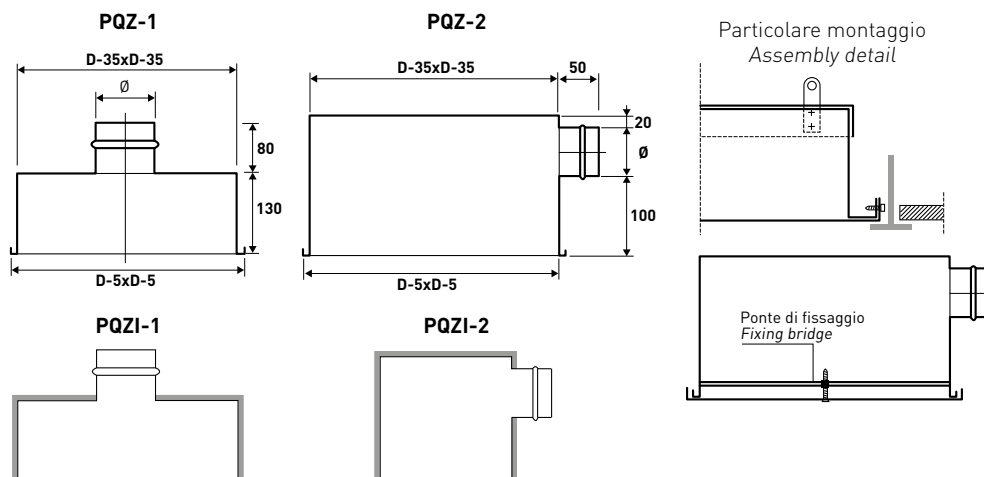
- Galvanized steel plenum,  
standard or insulated, with  
or without equalizer sheet,  
calibration damper and  
mounting bridge.

**PREZZI / PRICES**

				
	BQS	BQS-C		
mm	€	€	PEZZI PIECES	
* 600	-	-	5	
625	-	-	5	

**DISEGNI / DRAWINGS****PREZZI / PRICES PLENUM - BQS**

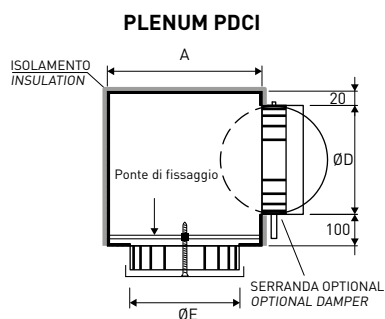
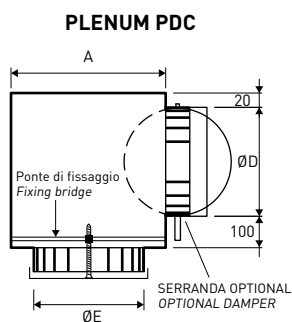
		Cannotto Spigot							
			PQZ-1	PQZI-1	PQZ-2	PQZI-2	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio Fixing bridge
mm	Ø mm	€	€	€	€	€	€	€	€
600	248	-	-	-	-	-	-	-	-
625	298	-	-	-	-	-	-	-	-

**DISEGNI / DRAWINGS**

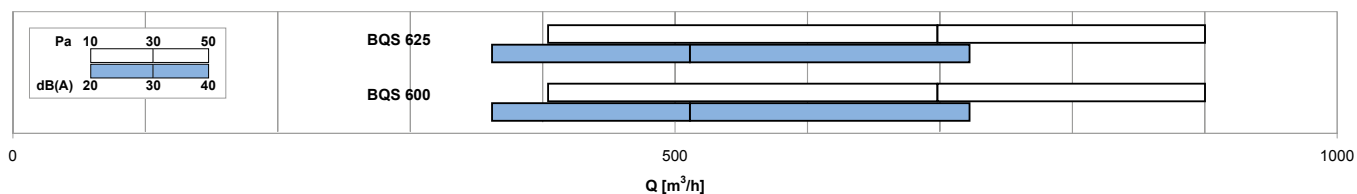
Plenum isolato esternamente spessore 6 mm  
Plenum externally insulated thickness 6 mm

## PREZZI / PRICES PLENUM BQS-C

	PLENUM ZINCATO mm / GALVANIZED PLENUM mm			PDC	PDCI	Serranda Damper	Equalizzatore Equalizer	Ponte di fissaggio
	AxA	ØD	ØE					
mm	mm	mm	mm	€	€	€	€	€
<b>598</b>	700	248	590	-	-	-	-	-
<b>623</b>	700	298	615	-	-	-	-	-



## DIAGRAMMA SCELTA RAPIDA / QUICK SELECTION DIAGRAM



## TABELLA DI SELEZIONE / SELECTION TABLE

Modello Model	$A_v$ [m²]	Q [m³/h]		$L_{wa}$ [dB(A)]		$X_{(0,20)}$ [m]		$D_{p_t}$ [Pa]	
		min	max	min	max	min	max	min	max
<b>BQS 600</b>	0,0368	400	900	23	46	3,3	7,4	10	50
<b>BQS 625</b>	0,0368	400	900	23	46	3,3	7,4	10	50